

### Transparent Waterborne Photocatalytic Dispersion.

A **PHOTOACTIVA TB**® activated surface uses light energy (\*) to continuously produce active radicals on the surfaces:

**Hydroxyl Radical:** often referred to as the "detergent" of the atmosphere because it reacts with many pollutants, decomposing them through "cracking", often acting as the first step to their removal. It also has an important role in eliminating some greenhouse gases

**Peroxy Radicals:** as active as the ozone, they are the precursors of hydrogen peroxide, one of the most important disinfectants, capable of destroying both bacteria and viruses or fungi.

So, a **PHOTOACTIVA TB**® activated surface

- ELIMINATES the air POLLUTION
- MAINTAINS the surfaces CLEAN
- IMPEDES the development of VIRUSES, BACTERIA and FUNGI
- ELIMINATES ODOURS
- CONTRIBUTES TO PEOPLE'S HEALTH

**PHOTOACTIVA TB**® is used on surfaces submitted to polluted environments, mainly in urban or industrial areas where traffic and chemical pollutants are concentrated. **PHOTOACTIVA TB**® contributes to reduce pollution, to keep surfaces clean, and to reduce odours, also impedes the growth of viruses, moulds and bacteria

#### - PHOTOCATALYSIS

Photocatalysis is a technology that works under the same principles than Photovoltaic Panels (Solar cells). It uses light energy (\*), to destroy elements that affect human health and dirt the air and the environment


- It is MAINTENANCE FREE, and its effect is PERMANENT.
- It is a CLEAN TECHNOLOGY
- It is a SURFACE CLEANER, and an AIR DEPOLLUTER
- DESTROYS the DIRT and IMPEDES the development of VIRUSES, MOULDS and BACTERIA
- Is a NATURAL effect, as naturally reproduces the activity of the sun and plants.

(\*) Photocatalysis requires light energy to be activated. Natural light, fluorescent, or incandescent bulbs are, in that order, suitable to activate the surfaces.

Black light, or LED lights emitting in the range of visible violet (380 nm) is optimal for a perfect activation. Even minimum power (0,01 Watt/ m<sup>2</sup>) of that light will eliminate up to 100 % of the biological load of the treated surfaces

#### -RESULTS

Up to 100 % reduction in ATP (1) measures can be obtained after 40-60 minutes in correctly illuminated surfaces  
And the following results were reached after 24 hrs

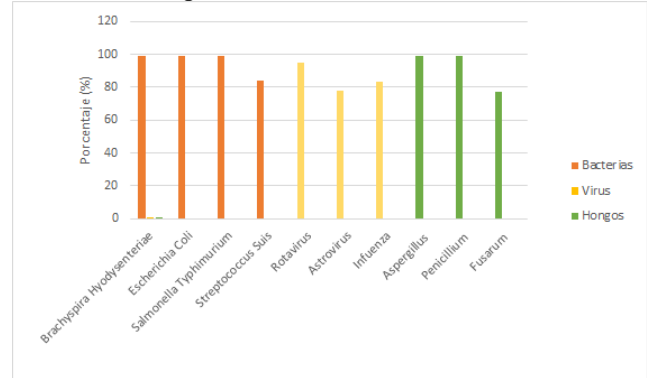

(1)Adenosine triphosphate (ATP) is a complex organic chemical that provides energy, often referred to as the "molecular unit of currency" of intracellular energy transfer. It is also a precursor to DNA and RNA.

#### -APPLICATION

**PHOTOACTIVA TB**® is currently applied as a mist, by spray gun, with a 0, 3 mm nozzle and low pressure. Creation of drops, or product accumulation, should be avoided. Surfaces must be clean and dry. A single application of 100-150 gr /m<sup>2</sup> is recommended.

**PHOTOACTIVA TB**® doesn't forms a film. **PHOTOACTIVA TB**® is applied on Coated Surfaces, Natural stone, Marble, Ceramics, Concrete, etc... Once applied, it develops adherence during the initial days.

**PHOTOACTIVA TB**® can have some whitening effect on coloured surfaces

#### -TECHNICAL DATA

Waterborne photocatalytic dispersion for the reduction of pollutants and protection of surfaces in highly contaminated areas.

- No flammable. Waterborne
- Translucent/ invisible once applied
- Appearance: low viscosity milky liquid
- Density 1.1 kg/l
- Does not create a film
- Yield: around 10 m<sup>2</sup>/lt. once applied by spray gun
- Application temperature: between 5°C and 35°C
- Protect from frost.

All data given in our technical information and recommendations are based on our experience, technical knowledge and practice, under established job and test conditions Customer must check consumptions and suitability under his particular job conditions, by previously testing it. Activa can provide Technical assessment if required.

We guarantee the quality in case of production defects of our products, excluding further claims. Our responsibility is limited to the value of the goods supplied.

That TDS is valid until next edition is issued

Since the outbreak of severe acute respiratory syndrome (SARS) in southern China was recognized in late February 2003, a large number of chemical disinfectants have been used in the epidemic area, which has caused public concern about human health and the environment.

The use of light-reinforced semiconductor minerals is an alternative to conventional chemical disinfectants (Hong He a, 2004).

The minerals selected by our company have been studied over the years for their antibacterial properties ((Wei C, 1994); (Watts RJ, 1995); (Kikuchi, 1997); (Cho M, 2005); (Benabbou, 2007); (Page, 2007)) and are attributed to ROS generation, especially hydroxyl (HO) and hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) free radicals (Kikuchi, 1997), as well as several study-focused experiments. of the inactivation properties of viruses (Liga & Bryant, 2011).

A study to highlight apart from Hong He's performed with Coronavirus inactivation, is that of Mannekarn et al, in 2007, which showed that certain semiconductor minerals that had been radiated with visible light (VL) inactivate rotavirus, astrovirus, and feline calicivirus. (FCV).

Viral concentrations were drastically reduced after exposure for 24 hours. This finding implied that the catalyst products might somehow initially interact with viral proteins in the virus inactivation process. In addition, he shows in his article a partial degradation of the rotaviral dsRNA genome. He also observed that as with bacteria, reactive oxygen species such as superoxide (O<sub>2</sub><sup>-</sup>) anions and hydroxyl radicals (·OH) were generated in a significant amount after stimulation for 8, 16 and 24 hrs. In conclusion, it states that inactivation of viruses as well as microorganisms in general could occur through O<sub>2</sub> and OH generation, followed by damage to the viral protein and genome (Niwart Maneekarn, 2007).

After a thorough search for minerals with these capabilities, optimum concentrations and synergies, **PHOTOACTIVA TB**® is manufactured, a liquid treatment for all types of installations, based on non-degradable harmless semiconductor minerals, which in combination with a source light (natural or artificial) permanently eliminates any type of virus, bacteria or fungus.

**PHOTOACTIVA TB**® also contains components to ensure the adhesion of these minerals and provide treatment durability of about three years.

### Bibliography

- Benabbou, A. D. (2007). Photocatalytic inactivation of Escherichia coli- effect of concentration of TiO<sub>2</sub> and microorganism, nature and intensity of UV irradiation. Applied Catalysis B-Environmental 76 (3-4), 257-263.**
- Cho M, C. H. (2005). Different inactivation behaviors of ms-2 phage and Escherichia coli in TiO<sub>2</sub> photocatalytic disinfection. . Appl Environ Microbiol 71(1), 270-275.**
- Hong He a, \*. X. (2004). Catalytic inactivation of SARS coronavirus, Escherichia coli. Elsevier, 170-172.**
- Kikuchi, Y. S. (1997). Photocatalytic bactericidal effect of TiO<sub>2</sub> thin films: dynamic view of the active oxygen species responsible for the effect. Journal of Photochemistry and Photobiology A: Chemistry 106, 51-56.**
- Liga, M. V., & Bryant, E. (2011). Virus inactivation by silver doped titanium dioxide nanoparticles for drinking water treatment. Elsevier, 535-544.**
- Niwart Maneekarn, W. E. (2007). Photocatalytic inactivation for diarrheal viruses by visible-light-catalytic titanium oxide. Clin. Lab., 413-421.**
- Page, K. P. (2007). Titania and silver Titania composite films on glass-potent antimicrobial coatings. Journal of Materials Chemistry 17 (1), 94-104.**
- Watts RJ, K. S. (1995). Photocatalytic inactivation of coliform bacteria and viruses in secondary wastewater effluent. Water Res 29(1), 95-100.**
- Wei C, L. W. (1994). Bactericidal activity of TiO<sub>2</sub> photocatalyst in aqueous media: toward a solar-assisted water disinfection system. Environ Sci Technol 28, 934-938.**



## Tratamiento fotocatalítico invisible para la protección de fachadas y monumentos.

Las paredes activadas con **PHOTO ACTIVA TB** utilizan la energía de la luz para destruir los contaminantes del aire. Por ello:

- ELIMINA LOS CONTAMINANTES DEL AIRE
- MANTIENE LIMPIAS LAS SUPERFICIES DE EDIFICIOS Y MONUMENTOS.
- EVITA QUE LAS SUPERFICIES SE ENSUCIEN (piedra, hormigón, ladrillo, superficies pintadas, etc.)
- ELIMINA LAS AGRESIONES DE LOS CONTAMINANTES DEL AIRE
- REDUCE LOS COSTES DE MANTENIMIENTO EN FACHADAS Y MONUMENTOS

**PHOTO ACTIVA TB** se usa para la protección exterior de superficies sometidas a la agresión de los contaminantes producidos por el tráfico y las industrias. **PHOTO ACTIVA TB** se usa en zonas de aire contaminado y en edificios y monumentos que se ensucian por dicha causa:

- Fachadas de piedra
- Obra vista, hormigón y prefabricados
- Edificios históricos
- Monumentos
- Paredes pintadas en áreas de gran contaminación

## LA FOTOCATALISIS

es una tecnología análoga a la de los paneles solares fotovoltaicos. Usa la energía de la luz para destruir los contaminantes producidos por automóviles e industrias, que afectan la salud de las personas, y ensucian

- No requiere mantenimiento, y su efecto es PERMANENTE.
- Es una TECNOLOGÍA LIMPIA
- No solo no ensucia, sino que LIMPIA EL AIRE CONTAMINADO
- AHORRA COSTES ya que las paredes se mantienen limpias muchos años
- DESTRUYE LA SUCIEDAD y evita el crecimiento de MICROORGANISMOS.

La fotocatalisis requiere de luz de energía suficiente. Luz solar, fluorescente o incandescente son, por este orden, adecuadas para la activación de las superficies.



Ensayos según ISO 22197-1 realizados en el CSIC, muestran una capacidad de eliminación del 78 % de los contaminantes medidos: 234 µg NO/m<sup>2</sup>.h usando luz natural

## -MODO DE APLICACIÓN

**PHOTO ACTIVA TB** se aplica a pistola a baja presión, con boquilla de 0.5 mm abierta. Evitando que se acumule y forme gotas.

Las superficies a proteger deben estar limpias y secas en el momento de la aplicación. Se recomienda una aplicación en una única mano, de 100-200 gr/m<sup>2</sup> **PHOTO ACTIVA TB** no forma película. Una vez seco, no altera las propiedades ni apariencia del sustrato.

**PHOTO ACTIVA TB** se aplica principalmente sobre superficies porosas minerales (mármoles, piedra natural, cerámica, morteros, obra vista, etc.,)

Las partículas activas se incorporan y permanecen en las superficies gracias al ligante a base de silicato.

PHOTOACTIVA S  
PHOTOACTIVA TB  
PHOTOACTIVA GL  
CRISTAL CLEAN

mayor actividad



mayor transparencia

mayor adherencia

**Aire Limpio  
Edificios Sanos  
y  
Siempre Limpios**



Superficie tratada fotocatalíticamente, tras tres años a la intemperie

## -CARACTERÍSTICAS TÉCNICAS

Solución Fotocatalítica en base Agua para la protección de superficies en ambientes contaminados.

- No inflamable
- No forma película
- Transpirable
- Elevada adherencia a sustratos minerales
- Rendimiento: 5-10 m<sup>2</sup>/lt aplicado a pistola
- Temperatura de aplicación: entre 5°C y 35°C
- Guardar en lugares protegidos de las heladas

***PhotoActiva TB. Dispersión acuosa de foto- catalizadores en forma de sol, con potenciadores de actividad para luz del rango UVA-Visible, y adherencia mejorada sobre superficies inorgánicas de limitada porosidad.***

Todos los proporcionados en nuestra información técnica están basados en nuestra experiencia, conocimientos técnicos y práctica en determinadas condiciones de trabajo y ensayo. El cliente debe comprobar consumos y la adaptación de los productos bajo sus particulares condiciones de trabajo, realizando sus propias pruebas. Active Walls puede proporcionar asesoría técnica si así se le requiere.

Garantizamos la calidad de los productos en caso de defecto de fabricación, excluyendo posteriores reclamaciones. Nuestra garantía se limita al valor de los productos adquiridos.

Ésta ficha técnica es válida hasta la emisión de una nueva versión